

OR-444 Sound Bag Harness Assembly Instructions

1. Unpack all pouch contents



2. Open up the velcro straps on the back of the top vest



3. Position the spine in the center of the top vest according to your height

Left



Right



Top



5. Insert the lower part of the spine into the center pouch of the waist belt



6. Pull the velcro strap through the groove inside the spine



7. Close the velcro strap to secure the spine in place



8. Attach the controller tube (for spine adjustment) to the waist belt using velcro



9. Your sound bag harness is ready to use!



Gear in motion

www.ORCAbags.com

OR-444 Sound Bag Harness Setup Instructions

1. Loosen the top vest straps all the way




2. Pull out the round buckles on the waist belt, then loosen the straps all the way

3. Place the harness on your hips, fasten the main buckle around your waist and pull the straps to tighten



4. Push and rotate the two round buckles to put more pressure on your hips

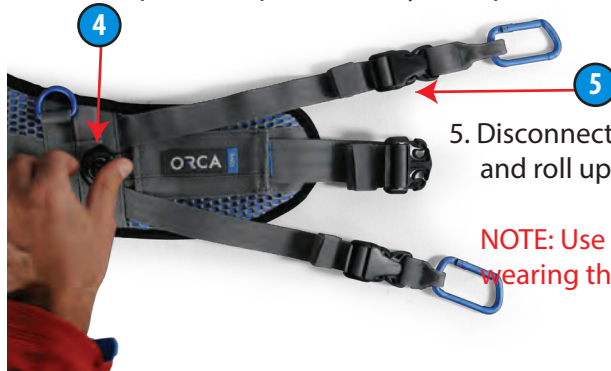

5. Disconnect the top buckle and roll up the top strap

NOTE: Use this strap only when wearing the waist belt by itself

6. Connect the top aluminum ring to the front connection on your mixer case
NOTE: We recommend connecting it as far as possible from your body

7. Connect the bottom aluminum ring to the front or rear D ring on your mixer case
NOTE: We recommend connecting it as far as possible from your body


8. Push the trigger to release the spine

9. Bend forward to lengthen the spine and shift the weight onto your hips, then release the trigger to lock the spine in the desired position



10. Adjust the straps on the top vest (these should be comfortable, not tight)

11. Adjust the straps on the waist belt (these should be tight) in order to distribute the weight onto your hips

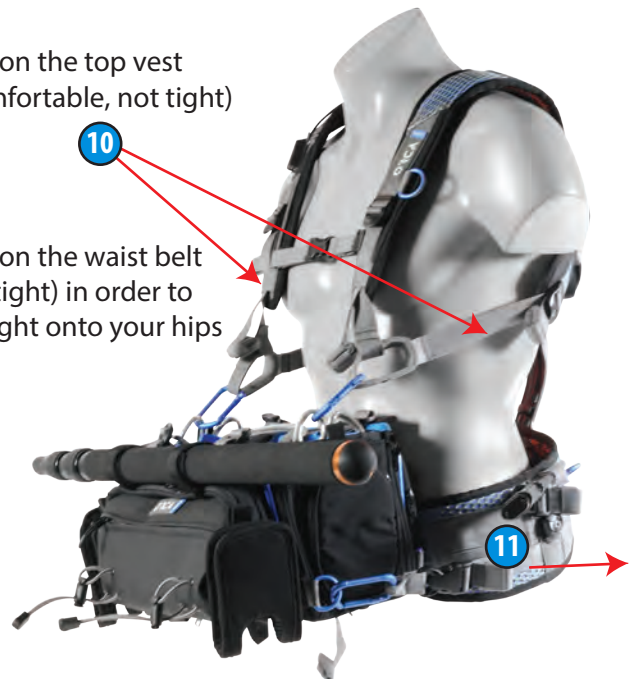

NOTE: You can use the trigger to play with the spine height while you work in order to shift the weight distribution from shoulders to hips

ORCA

BAGS

Gear in motion

www.ORCAbags.com